

BEADAM[®]

2012/2013

Professional Catering Scales



The Right Balance - Speed, Performance, Value

www.adamequipment.com.au





Dune® Compact Balances

Technical Specifications

| Model | DCT 201 | DCT 2000 | DCT 5000 |
|----------------------------|---|----------|----------|
| Maximum capacity | 200g | 2000g | 5000g |
| Readability | 0.1g | 1g | 2g |
| Pan size | 145mm x 145mm | | |
| Units of measure | DCT 201 - gram (g), ounce (oz) DCT 2000 & 5000 - gram (g), ounce (oz), pound (lb) | | |
| Display | LCD with 15mm-high digits | | |
| Overall dimensions (wxdxh) | 208 x 147 x 40mm | | |

Features

- Weighs in g, oz, lb
- Overload protection
- Splash-proof to protect from spills
- Durable construction
- Low-battery indicator
- 6xAA battery or AC adapter (adapter included)
- Automatic power-off saves battery life



LBK Bench Scales

Technical Specifications

| Model | LBK 3 | LBK 6 | LBK 12 | LBK 30 |
|----------------------------|--|-------|--------|--------|
| Maximum capacity | 3000g | 6000g | 12kg | 30kg |
| Readability | 0.5g | 1g | 2g | 5g |
| Pan size | 250mm x 180mm | | | |
| Units of measure | gram (g), kilogram (kg), pound (lb), ounce (oz), pound:ounce (lb:oz) | | | |
| Display | Large backlit LCD with six digits | | | |
| Overall dimensions (wxdxh) | 250 x 307 x 110mm | | | |

Features

- Weighs in g, kg, lb, oz, lb:oz
- Customisable, selectable weighing units and applications
- Stainless steel pan
- Overload protection
- Overload alarm
- Adjustable levelling feet
- Automatic power-off saves battery life
- Rechargeable battery and AC adapter included

WBW Wash-Down Scales

Technical Specifications

| Model | WBW 2 | WBW 4 | WBW 8 | WBW 16 |
|----------------------------|--|-------|-------|--------|
| Maximum capacity | 2000g | 4000g | 8000g | 16kg |
| Readability | 0.2g | 0.5g | 1g | 2g |
| Pan size | 210mm x 173mm | | | |
| Units of measure | gram (g), kilogram (kg), pound (lb), ounce (oz), pound:ounce (lb:oz) | | | |
| Display | Large backlit LCD with six digits | | | |
| Overall dimensions (wxdxh) | 231 x 265 x 153mm | | | |




Features

- Weighs in g, kg, lb, oz, lb:oz
- IP66-rated for wash-down protection
- Coloured LED check limit indicators for visual check weighing
- Large backlit LCD with capacity tracker
- Stainless steel pan
- Adjustable levelling feet
- Full-range tare
- Automatic power-off saves battery life
- Rechargeable battery and AC adapter included

CPWplus Weighing Scales

Technical Specifications

| Model | CPWplus 35 | CPWplus 75 | CPWplus 150 | CPWplus 200 |
|----------------------------|--|------------|-------------|-------------|
| Maximum capacity | 35kg | 75kg | 150kg | 200kg |
| Readability | 10g | 20g | 50g | 50g |
| Pan size | 300mm x 300mm | | | |
| Units of measure | kilogram (kg), pound (lb), ounce (oz), pound:ounce (lb:oz) | | | |
| Display | Backlit LCD with minimum 25mm-high digits | | | |
| Overall dimensions (wxdxh) | Indicator: 220 x 95 x 43mm - CPWplus: 300 x 300 x 50mm | | | |

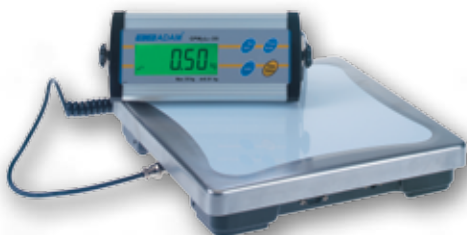

Features

- Weighs in kg, lb, oz, lb:oz
- RS-232 interface for communication with printers and computers
- Stainless steel pan with remote indicator
- Large backlit LCD
- Simple four-button operation
- Hold function
- Wall mounting kit is standard
- 6xAA battery or AC adapter (adapter included)

AZextra Price Computing Retail Scales

Technical Specifications

EC and Australian-Type-Approved Models:

| Model | AZextra 3 | AZextra 6 | AZextra 15 | AZextra 30 |
|----------------------------|--|-----------|------------|------------|
| Maximum capacity | 3000g | 6000g | 15kg | 30kg |
| Readability | 1g | 2g | 5g | 10g |
| Pan size | 225mm x 275mm | | | |
| Units of measure | gram (g), kilogram (kg) | | | |
| Display | Large backlit LCD shows weight, unit price and final price | | | |
| Overall dimensions (wxdxh) | AZextra: 315 x 355 x 110mm | | | |

Australian Approval Certificate No: 6/4D/335

Pillar Versions

EC and Australian-Type-Approved Models:

| Model | AZextra 3P | AZextra 6P | AZextra 15P | AZextra 30P |
|----------------------------|--|------------|-------------|-------------|
| Maximum capacity | 3000g | 6000g | 15kg | 30kg |
| Readability | 1g | 2g | 5g | 10g |
| Pan size | 225mm x 275mm | | | |
| Units of measure | gram (g), kilogram (kg) | | | |
| Display | Large backlit LCD shows weight, unit price and final price | | | |
| Overall dimensions (wxdxh) | AZextra P: 315 x 355 x 535mm | | | |

Australian Approval Certificate No: 6/4D/335



Features

- Weighs in g, kg
- Australian type-approved
- RS-232 interface for communication with printers and computers
- Front and rear backlit displays for operator and customer to see the total cost, unit price and weight
- Unit price can be entered through the full numeric keypad
- 103 product look up (PLU) memories to store a full range of products
- Auto-clear function can be set to automatically delete the last unit price entry to help reduce miscalculation
- Non-slip adjustable feet
- Colour coding quickly helps identify frequently used keys
- Real time clock and date
- Stainless steel pan
- Full-range tare
- Automatic power-off saves battery life
- Rechargeable battery provides up to 90 hours of operation on a single charge
- AC adapter included

CBK Bench Weighing Scales



Technical Specifications

| Model | CBK 4 | CBK 8H | CBK 8 | CBK 16 | CBK 32 | CBK 48 |
|----------------------------|-----------------------------------|--------|-------|--------|--------|--------|
| Maximum capacity | 4000g | 8000g | 8000g | 16kg | 32kg | 48kg |
| Readability | 0.1g | 0.1g | 0.2g | 0.5g | 1g | 2g |
| Pan size | 225mm x 275mm | | | | | |
| Units of measure | gram (g), kilogram (kg) | | | | | |
| Display | Large backlit LCD with six digits | | | | | |
| Overall dimensions (wxdxh) | 315 x 355 x 110mm | | | | | |

Features

- Weighs in g, kg
- Customisable, selectable weighing units and applications
- Overload alarm
- Parts counting with freely selectable sample sizes
- Check weighing LED indicators
- Adjustable levelling feet
- Stainless steel pan
- Automatic power-off saves battery life
- Rechargeable battery

GBK Bench Weighing Scales

Technical Specifications

| Model | GBK 8 | GBK 16 | GBK 32 | GBK 60 | GBK 120 |
|----------------------------|---|--------|--------|--------|---------|
| Maximum capacity | 8kg | 16kg | 32kg | 60kg | 120kg |
| Readability | 0.1g | 0.5g | 1g | 2g | 5g |
| Pan size | 300mm x 400mm | | | | |
| Units of measure | gram (g), kilogram (kg) | | | | |
| Display | Large backlit LCD with 25mm-high digits | | | | |
| Overall dimensions (wxdxh) | 300 x 520 x 680mm | | | | |

Features

- Weighs in g, kg
- RS-232 interface for communication with printers and computers
- Type 304 stainless steel pan
- Automatic external calibration
- Solid metal construction
- Indicator, ABS plastic housing
- Pre-set tare
- Automatic accumulation
- Hold function
- Large backlit LCD with capacity tracker
- Parts counting with freely selectable sample sizes
- Check weighing LED indicators
- Real-time clock and date
- Selectable multi-language text
- Automatic power-off saves battery life
- Rechargeable battery and AC adapter included



GFK and GFK-M Floor Check Weighing Scales

Technical Specifications

| Model | GFK 75 | GFK 150 | GFK 300 | GFK 600 | GFK 75H | GFK 150H |
|-----------------------------|---|---------|---------|---------------|---------------|----------|
| Maximum capacity | 75kg | 150kg | 300kg | 600kg | 75kg | 150kg |
| Readability | 5g | 10g | 20g | 50g | 1g | 2g |
| Pan size | 400mm x 500mm | | | 600mm x 800mm | 400mm x 500mm | |
| Units of measure | gram (g), kilogram (kg) | | | | | |
| Display | Large backlit LCD with 25mm-high digits and capacity tracker | | | | | |
| Overall dimensions (wx dxh) | 400 x 620 x 860mm (GFK 75, 150, 300), 600 x 940 x 900mm (GFK 600) | | | | | |



Technical Specifications EC and Australian-Type-Approved Models:

| Model | GFK 60M | GFK 150M | GFK 300M |
|-----------------------------|--|----------|----------|
| Maximum capacity | 60kg | 150kg | 300kg |
| Readability | 20g | 50g | 100g |
| Pan size | 400mm x 500mm | | |
| Units of measure | kilograms (kg) | | |
| Display | Large backlit LCD with 25mm-high digits and capacity tracker | | |
| Overall dimensions (wx dxh) | 400 x 620 x 860mm | | |

Australian Approval Certificate No: 6/4D/335

Features

- Weighs in g, kg
- Australian type-approved
- RS-232 interface for communication with printers and computers
- Type 304 stainless steel pan
- Full-range tare
- Large backlit LCD with capacity tracker
- Parts counting with freely selectable sample sizes
- Check weighing LED indicators
- Automatic memory accumulation
- Accessible internal rechargeable battery and AC adapter included
- Automatic power-off saves battery life

Warrior Wash-Down Scales



Technical Specifications

| Model | WSK 8 | WSK 16 | WSK 32 | WBK 32 | WBK 75 | WFK 75 | WFK 150 | WLK 150 |
|------------------|--|--------|--------|---------------|--------|---------------|---------|---------------|
| Capacity | 8kg | 16kg | 32kg | 32kg | 75kg | 75kg | 150kg | 150kg |
| Readability | 0.5g | 1g | 2g | 2g | 5g | 5g | 10g | 10g |
| Pan Size | 250mm x 250mm | | | 300mm x 400mm | | 400mm x 500mm | | 450mm x 600mm |
| Units of measure | gram (g), kilogram (kg), pound (lb), ounce (oz), pound:ounce (lb:oz), Newton (N) | | | | | | | |
| Display | Large backlit display with 40mm-high digits and capacity tracker | | | | | | | |

Features

- Weighs in g, kg, lb, oz, lb:oz, N
- IP66-rated indicator and IP67-rated load cell for wash-down and dust protection
- RS-232 interface for communication with printers and computers
- Type 304 stainless steel construction
- Large backlit LCD with capacity tracker
- Check-weighing LED indicators
- External automatic calibration
- Adjustable indicator for ultimate viewing angle
- Non-slip rubber feet
- Colour-coded keypad with symbols and text
- Display/hold function
- Optional expansion unit for relay output
- Rechargeable battery provides up to 90 hours of operation on a single charge
- AC adapter included
- Automatic power-off saves battery life



www.adamequipment.com.au

Supplied by:

Mansfield Hospitality Supplies
 5 Collopy St
 Mansfield Vic 3722
 Ph 03 5779 1660
 Email sales@m-h-s.com.au